

## LC1D12F7

TeSys D contactor - 3P(3 NO) - AC-3 -  $\leq 440$  V 12 A - 110 V AC coil



### Main

|                                             |                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range                                       | TeSys                                                                                                                                                                                                                                                                                                                     |
| Product name                                | TeSys D                                                                                                                                                                                                                                                                                                                   |
| Product or component type                   | Contacteur                                                                                                                                                                                                                                                                                                                |
| Device short name                           | LC1D                                                                                                                                                                                                                                                                                                                      |
| Contacteur application                      | Motor control<br>Resistive load                                                                                                                                                                                                                                                                                           |
| Utilisation category                        | AC-1<br>AC-3<br>AC-4                                                                                                                                                                                                                                                                                                      |
| Poles description                           | 3P                                                                                                                                                                                                                                                                                                                        |
| Pole contact composition                    | 3 NO                                                                                                                                                                                                                                                                                                                      |
| [Ue] rated operational voltage              | $\leq 690$ V AC 25...400 Hz for power circuit<br>$\leq 300$ V DC for power circuit                                                                                                                                                                                                                                        |
| [Ie] rated operational current              | 12 A ( $\leq 60$ °C) at $\leq 440$ V AC AC-3 for power circuit<br>25 A ( $\leq 60$ °C) at $\leq 440$ V AC AC-1 for power circuit                                                                                                                                                                                          |
| Motor power kW                              | 7.5 kW at 500 V AC 50/60 Hz AC-3<br>7.5 kW at 660...690 V AC 50/60 Hz AC-3<br>5.5 kW at 380...400 V AC 50/60 Hz AC-3<br>5.5 kW at 415...440 V AC 50/60 Hz AC-3<br>3 kW at 220...230 V AC 50/60 Hz AC-3<br>3.7 kW at 400 V AC 50/60 Hz AC-4                                                                                |
| Motor power hp                              | 2 hp at 230/240 V AC 50/60 Hz for 1 phase motors<br>3 hp at 200/208 V AC 50/60 Hz for 3 phases motors<br>3 hp at 230/240 V AC 50/60 Hz for 3 phases motors<br>7.5 hp at 460/480 V AC 50/60 Hz for 3 phases motors<br>10 hp at 575/600 V AC 50/60 Hz for 3 phases motors<br>0.5 hp at 115 V AC 50/60 Hz for 1 phase motors |
| Control circuit type                        | AC 50/60 Hz                                                                                                                                                                                                                                                                                                               |
| [Uc] control circuit voltage                | 110 V AC 50/60 Hz                                                                                                                                                                                                                                                                                                         |
| Auxiliary contact composition               | 1 NO + 1 NC                                                                                                                                                                                                                                                                                                               |
| [Uimp] rated impulse withstand voltage      | 6 kV conforming to IEC 60947                                                                                                                                                                                                                                                                                              |
| Overvoltage category                        | III                                                                                                                                                                                                                                                                                                                       |
| [Ith] conventional free air thermal current | 25 A at $\leq 60$ °C for power circuit<br>10 A at $\leq 60$ °C for signalling circuit                                                                                                                                                                                                                                     |
| Irms rated making capacity                  | 250 A at 440 V for power circuit conforming to IEC 60947<br>140 A AC for signalling circuit conforming to IEC 60947-5-1<br>250 A DC for signalling circuit conforming to IEC 60947-5-1                                                                                                                                    |
| Rated breaking capacity                     | 250 A at 440 V for power circuit conforming to IEC 60947                                                                                                                                                                                                                                                                  |
| [Icw] rated short-time withstand current    | 105 A $\leq 40$ °C 10 s power circuit<br>210 A $\leq 40$ °C 1 s power circuit<br>30 A $\leq 40$ °C 10 min power circuit<br>61 A $\leq 40$ °C 1 min power circuit<br>100 A 1 s signalling circuit<br>120 A 500 ms signalling circuit<br>140 A 100 ms signalling circuit                                                    |
| Associated fuse rating                      | 25 A gG at $\leq 690$ V coordination type 2 for power                                                                                                                                                                                                                                                                     |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                               | circuit<br>40 A gG at ≤ 690 V coordination type 1 for power circuit<br>10 A gG for signalling circuit conforming to IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Average impedance             | 2.5 mOhm at 50 Hz - Ith 25 A for power circuit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| [Ui] rated insulation voltage | 600 V for power circuit certifications CSA<br>600 V for power circuit certifications UL<br>690 V for power circuit conforming to IEC 60947-4-1<br>690 V for signalling circuit conforming to IEC 60947-1<br>600 V for signalling circuit certifications CSA<br>600 V for signalling circuit certifications UL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Electrical durability         | 2 Mcycles 12 A AC-3 at Ue ≤ 440 V<br>0.8 Mcycles 25 A AC-1 at Ue ≤ 440 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Power dissipation per pole    | 0.36 W AC-3<br>1.56 W AC-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Protective cover              | With                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Mounting support              | Plate<br>Rail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Standards                     | UL 508<br>CSA C22.2 No 14<br>EN 60947-4-1<br>EN 60947-5-1<br>IEC 60947-4-1<br>IEC 60947-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Product certifications        | BV<br>CCC<br>CSA<br>DNV<br>GL<br>GOST<br>LROS (Lloyds register of shipping)<br>RINA<br>UL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Connections - terminals       | Control circuit : screw clamp terminals 2 cable(s)<br>1...2.5 mm <sup>2</sup> - cable stiffness: flexible - with cable end<br>Power circuit : screw clamp terminals 1 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: flexible - with cable end<br>Control circuit : screw clamp terminals 1 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end<br>Control circuit : screw clamp terminals 2 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end<br>Control circuit : screw clamp terminals 1 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: flexible - with cable end<br>Control circuit : screw clamp terminals 1 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: solid - without cable end<br>Control circuit : screw clamp terminals 2 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: solid - without cable end<br>Power circuit : screw clamp terminals 1 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end<br>Power circuit : screw clamp terminals 2 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: flexible - without cable end<br>Power circuit : screw clamp terminals 2 cable(s)<br>1...2.5 mm <sup>2</sup> - cable stiffness: flexible - with cable end<br>Power circuit : screw clamp terminals 1 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: solid - without cable end<br>Power circuit : screw clamp terminals 2 cable(s)<br>1...4 mm <sup>2</sup> - cable stiffness: solid - without cable end |
| Tightening torque             | Power circuit : 1.7 N.m - on screw clamp terminals<br>- with screwdriver flat Ø 6 mm<br>Power circuit : 1.7 N.m - on screw clamp terminals<br>- with screwdriver Philips No 2<br>Control circuit : 1.7 N.m - on screw clamp                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

terminals - with screwdriver flat Ø 6 mm  
Control circuit : 1.7 N.m - on screw clamp  
terminals - with screwdriver Philips No 2

|                          |                                                                                                                                                                      |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating time           | 4...19 ms opening<br>12...22 ms closing                                                                                                                              |
| Safety reliability level | B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1<br>B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1 |
| Mechanical durability    | 15 Mcycles                                                                                                                                                           |
| Operating rate           | 3600 cyc/h at ≤ 60 °C                                                                                                                                                |

## Complementary

|                                 |                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Coil technology                 | Without built-in suppressor module                                                                                                         |
| Control circuit voltage limits  | 0.3...0.6 Uc drop-out at 60 °C, AC 50/60 Hz<br>0.8...1.1 Uc operational at 60 °C, AC 50 Hz<br>0.85...1.1 Uc operational at 60 °C, AC 60 Hz |
| Inrush power in VA              | 70 VA at 20 °C (cos φ 0.75) 60 Hz<br>70 VA at 20 °C (cos φ 0.75) 50 Hz                                                                     |
| Hold-in power consumption in VA | 7.5 VA at 20 °C (cos φ 0.3) 60 Hz<br>7 VA at 20 °C (cos φ 0.3) 50 Hz                                                                       |
| Heat dissipation                | 2...3 W at 50/60 Hz                                                                                                                        |
| Auxiliary contacts type         | Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1<br>Type mirror contact (1 NC) conforming to IEC 60947-4-1               |
| Signalling circuit frequency    | 25...400 Hz                                                                                                                                |
| Minimum switching current       | 5 mA for signalling circuit                                                                                                                |
| Minimum switching voltage       | 17 V for signalling circuit                                                                                                                |
| Non-overlap time                | 1.5 ms on energisation between NC and NO contact<br>1.5 ms on de-energisation between NC and NO contact                                    |
| Insulation resistance           | > 10 MOhm for signalling circuit                                                                                                           |

## Environment


|                                                       |                                                                                                                                                                                |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IP degree of protection                               | IP20 front face conforming to IEC 60529                                                                                                                                        |
| protective treatment                                  | TH conforming to IEC 60068-2-30                                                                                                                                                |
| pollution degree                                      | 3                                                                                                                                                                              |
| ambient air temperature for operation                 | -5...60 °C                                                                                                                                                                     |
| ambient air temperature for storage                   | -60...80 °C                                                                                                                                                                    |
| permissible ambient air temperature around the device | -40...70 °C at Uc                                                                                                                                                              |
| operating altitude                                    | 3000 m without derating in temperature                                                                                                                                         |
| fire resistance                                       | 850 °C conforming to IEC 60695-2-1                                                                                                                                             |
| flame retardance                                      | V1 conforming to UL 94                                                                                                                                                         |
| mechanical robustness                                 | Vibrations contactor open 2 Gn, 5...300 Hz<br>Vibrations contactor closed 4 Gn, 5...300 Hz<br>Shocks contactor open 10 Gn for 11 ms<br>Shocks contactor closed 15 Gn for 11 ms |
| height                                                | 77 mm                                                                                                                                                                          |
| width                                                 | 45 mm                                                                                                                                                                          |
| depth                                                 | 86 mm                                                                                                                                                                          |
| product weight                                        | 0.325 kg                                                                                                                                                                       |

## Offer Sustainability

|                                  |                                                                       |
|----------------------------------|-----------------------------------------------------------------------|
| Sustainable offer status         | Green Premium product                                                 |
| RoHS (date code: YYWW)           | Compliant - since 0627 - Schneider Electric declaration of conformity |
| REACH                            | Reference not containing SVHC above the threshold                     |
| Product environmental profile    | Available                                                             |
| Product end of life instructions | Available                                                             |

## Contractual warranty


### Dimensions

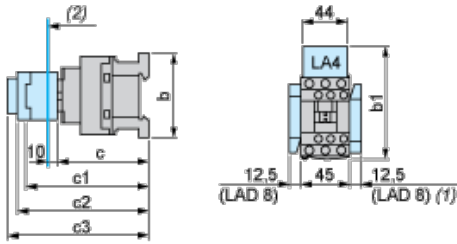



- (1) Including LAD 4BB
- (2) Minimum electrical clearance

| LC1        |                                    | D09...D18          | D093...D123        | D099...D129          |
|------------|------------------------------------|--------------------|--------------------|----------------------|
| <b>b</b>   | without add-on blocks              | 77                 | 99                 | 80                   |
| <b>b1</b>  | with LAD 4BB                       | 94                 | 107                | 95.5                 |
|            | with LA4 D•2                       | 110 <sup>(1)</sup> | 123 <sup>(1)</sup> | 111.5 <sup>(1)</sup> |
|            | with LA4 DF, DT                    | 119 <sup>(1)</sup> | 132 <sup>(1)</sup> | 120.5 <sup>(1)</sup> |
|            | with LA4 DW, DL                    | 126 <sup>(1)</sup> | 139 <sup>(1)</sup> | 127.5 <sup>(1)</sup> |
| <b>c</b>   | without cover or add-on blocks     | 84                 | 84                 | 84                   |
|            | with cover, without add-on blocks  | 86                 | 86                 | 86                   |
| <b>c1</b>  | with LAD N or C (2 or 4 contacts)  | 117                | 117                | 117                  |
| <b>c2</b>  | with LA6 DK10, LAD 6K10            | 129                | 129                | 129                  |
| <b>c3</b>  | with LAD T, R, S                   | 137                | 137                | 137                  |
|            | with LAD T, R, S and sealing cover | 141                | 141                | 141                  |
| <b>(1)</b> | Including LAD 4BB.                 |                    |                    |                      |

### Wiring



### Our Proposal - Type 1 : Circuit Breaker + Contactor for Motor Power 5,5 kW and 415 VAC

| Motor Power (kW) | Icu (kA) | Breaker                                                                                        | Contactor                                                                                       |
|------------------|----------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| 5.5              | 15       | <br>GV2ME16 | <br>LC1D12F7 |

Non contractual pictures. Type 1 coordination requires that in a short-circuit condition, the contactor or starter must not present any danger to personnel or installations and must not be able to resume operation without repair or the replacement of parts.